

Standard Features

Construction

High Strength Aluminum Walls with Heavy Duty Aluminum Lower and Upper Rails

Capacity

100 Cubic Yards

Dimensions

Standard 42' Length -
96" Wide - 13' 1" Tall

Suspension

Hutch - 4 Spring - 3 Point -
56,000 Capacity

Axles

(2) 25K lbs. - 71.5" Track-Hub-Piloted -
30/30 Chambers

Landing Gear

Heavy Duty Two Speed

Floor Sills

High Strength Wax Coated I Beams

Floor Type

High Strength Corrugated Aluminum
or Halco Live Floors

Bottom Rail

Heavy Duty Extruded Aluminum

Side Sheet Material

High Strength Natural Aluminum

Side Posts

Extruded Aluminum on
12" Centers

Top Rail

Heavy Duty Extruded Aluminum

Top

Open Top or
Closed Top

Tarp System

Cable Pull Mesh Tarp

Rear Gate

Heavy Duty Construction
all Aluminum

Upper Coupler

Full Width Upper Coupler with
Integrated Pick-up

Ladders

Steel Front - Aluminum Rear

Bumper


Heavy Duty Push Bumper

Lights

Sealed Wiring Harness w/L.E.D. Pkg.

Paint

Color Black - 2 Part Polyurethane
Primer & Paint

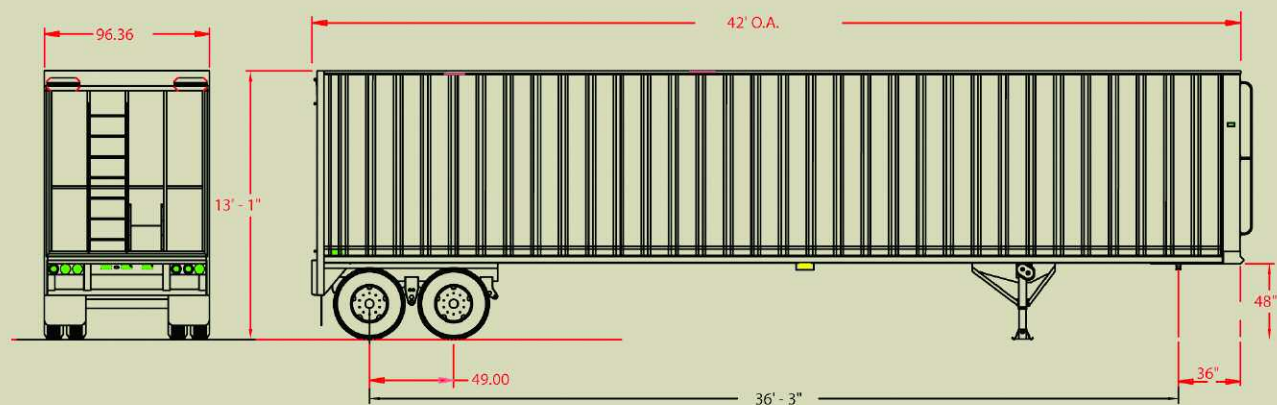


Phone 334-897-2525 • www.dorseytrailer.net

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment.



A Dorsey's More Durable



Craftsmen on the Dorsey factory floor, circa 1911.



In 1911, the folks in Elba, Alabama set out to build the most durable custom trailers on the market. Today, Dorsey's vision remains the same.



Waxed Coated Floor Sills on 12" Centers



Extruded Aluminum Lower Rail Post on 12" Centers



Aluminum Vent Covers



Full Width Upper Coupler with Integrated Pick-up



18" Diagonal Front Design



Hallco Live Floors



Closed Top



Multiple Axle Configurations

