

Standard Features



Length
Overall: 53' Inside: 52' - 2¹/₂'

Width
Overall: 102" Inside: 96.5"

Height
Overall: 13'6" Inside: 103"

Clear Door Opening
Width: 96.11" Height: 98.38"

Weight
13,480 +/- 3%

Load Capacity
Tandem Axle: 55,000lbs.
Max Load Dist. on 10' Span: 27,500lbs.

Kingpin
AAR Rated, 36" Setting

Suspension & Subframe
Air-Ride Slide Rails 212"

Axles
20,000lb. GAWR, Type 30/30
Chambers, 5.5 Slacks, 16.5" x 7"

Wheels
8.25" x 22.5" Prepainted White Disc

Tires
295/75R 22.5

Landing Gear
2 Speed 50,000lb Capacity

Rear Under-Ride Guard
Stainless Steel with Anti-slip

Crossmembers
4" Steel I-Beams on 12" centers

Floors
1¹/₄" Aluminum Heavy Duty Duct

Floor Furring
Composite Material

Side Panels
.040" Aluminum Prepainted
White Corrugated

Side Posts
2" Aluminum "Z" Post on 12" and
24" centers

Roof Bows
Extruded Aluminum on 24" centers

Roof Sheet
.032" Aluminum

Rear Doors
Quilted Stainless Steel swing doors with
(4) Hinges and (1) lock-rod per door


Lining
Front: .075" NXT
Sides: .075" NXT
Ceiling: .060" NXT

Scuffband
Extruded Aluminum, 17" High, Full length
Inside Width Scuff to Scuff 96"

Insulation
Front: 3" Sides: 2¹/₂"
Ceiling: 3" Floor: 2³/₄"
Door: 3"

Forklift Package
48" Deep

Lights
LED and Incandescent Package

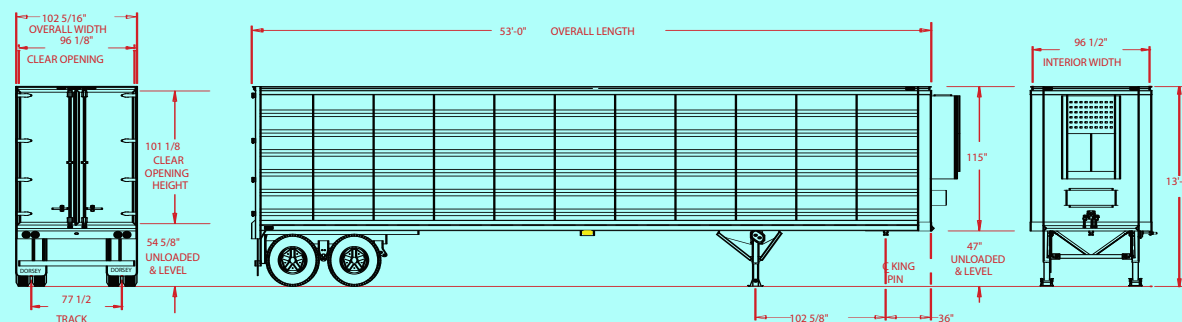

Phone 334-897-2525 • www.dorseytrailer.net

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment.



A Dorsey's More Durable



Craftsmen on the Dorsey factory floor
Circa 1911.



A Dorsey's More Durable




In 1911,
the folks in Elba, Alabama set out to build
the most durable custom trailers on the market.
Today, Dorsey's vision remains the same.



Stainless Steel Corner Radius



Optional Stainless Steel Door Locks

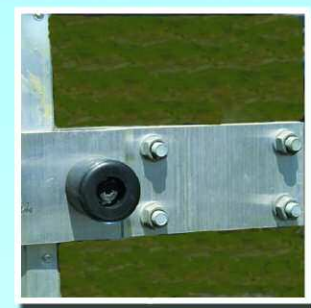

Standard 4-Bolt Hinges - (4) Four per Door with Integrated Bumper



Standard 17" Heavy Duty Scuff



Impact Gusset and Bumper Blocks



Optional Quad Hardware Door Locks




Suspension, Air Ride Slider w/Aluminum Optional Color Corrosion Resistant Paint




Optional 4" Aluminum Crossmembers



Foam in Place Roof to Side Continuous Seal

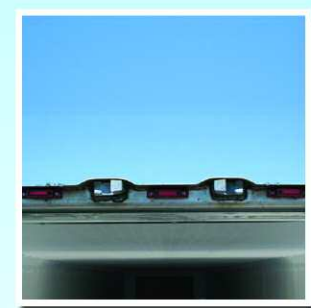

Optional Shallow Rear Door Header

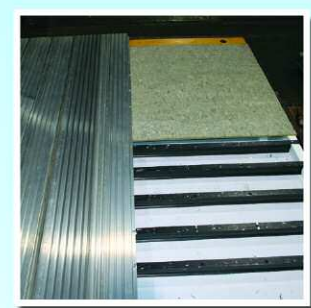

Composite Stringers, Composite Load plate, Steel Approach Plate



Stainless Steel Upper Coupler with Integrated Pick-Up Angle



Optional Tuck Away Liftgate



Optional Stainless Steel Door Vent



Smooth Insulated Side Walls and Ceiling Lining



Stainless Rear Frame, Galvanized Door Locks, Stainless Quilted Rear Doors, LED Light Package



Foam-In Place Method Provides a Superior Continuous Seal



Two-Speed Landing Gear 50,000lb Capacity



Optional Pull-out Platform and Step



Optional Roll-Up Door Pictured with Painted Rear Frame



Optional Dome Lights and Surface Mounted E-Track



Optional Side Doors



Optional Dock Board Guide Plates