

# Standard Features

## Length

Overall: 53' Inside: 52' - 6.25"

## Width

Overall: 102" Inside: 98.72"

## Height

Overall: 13'6" Inside: 110"

## Clear Door Opening

Width: 98" Height: 110"

## Weight

13,600lbs. +/-3%

## Load Capacity

Tandem Axle: 55,000lbs.  
Max Load Dist. on 10' Span: 27,500lbs.

## Kingpin

AAR Rated, 36" Setting

## Suspension & Subframe

Air-Ride Slide Rails 212"

## Axles

20,000lb. GAWR,30/30 Chambers  
5.5 Slacks, 16.5" x 7" Brakes

## Wheels

8.25" x 22.5" Prepainted White Disc

## Tires

295/75R 22.5

## Landing Gear

2 Speed 50,000lb Capacity

## Rear Under-Ride Guard

Carbon Steel with Anti-slip

## Crossmembers

4" Steel I-Beams on 12" centers

## Floors

1<sup>3</sup>/<sub>8</sub>" Nominal Laminated Hardwood

## Side Panels

.050" Aluminum Prepainted  
White Smooth

## Side Posts

18 Gauge Galvanized Steel  
16" and 24" Centers

## Roof Bows

Galvanized Steel Anti-Snag on  
24" Centers

## Roof Sheet

.040" Aluminum

## Rear Doors

Swing Type .75" Plymetal with  
Dual Durometer Door Seals  
(4) Hinges and (1) Lock-Rod per Door

## Lining

Front: 1/2" Plywood  
Sides: 1/4" Plywood  
Ceiling: Optional

## Scuffband




16 Gauge Galvanized Steel 12" High,  
Full Length

## Forklift Package

Threshold Plate, 1/8" Smooth Steel  
10-<sup>3</sup>/<sub>8</sub>" Deep, Recessed at Front,  
Welded at Rear

## Lights


LED and Incandescent Package

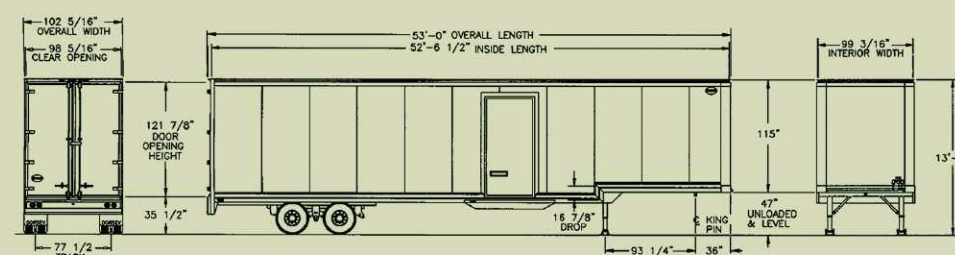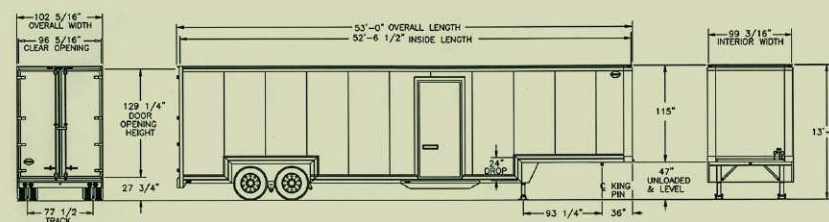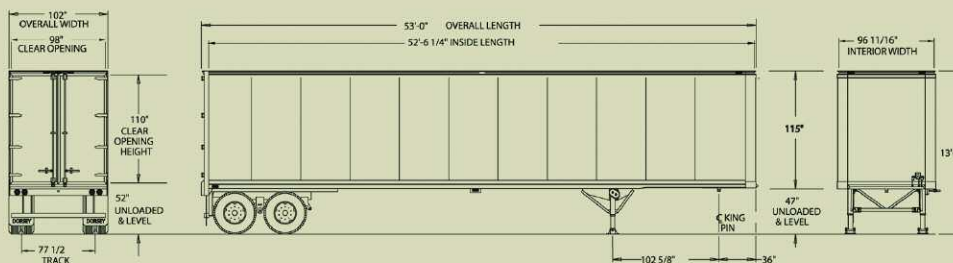

Phone 334-897-2525 • [www.dorseytrailer.net](http://www.dorseytrailer.net)

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment.

*A Dorsey's More Durable*



**In 1911,**  
the folks in Elba, Alabama set out to build  
the most durable custom trailers on the market.  
**Today, Dorsey's vision remains the same.**



Stainless Rear Frame, Galvanized Door Locks, Stainless Quilted Rear Doors, LED Light Package Rear Header and Bumper



2-Speed Landing Gear, 50,000lb Capacity



4" Wax Coated Cross Members with Integrated Electrical and Air Lines



Rear Frame with Hinge Protection



Stainless Steel Door Locks



Suspension, Air-Ride Slider with Aluminum Color Resistant Paint



Tuck Away Liftgate



4-Bolt Hinges - (4) Four per Door with Integrated Bumper



Shallow Rear Door Header



Threshold Plate Recessed at Front, Welded at Rear



Plywood Lined 3/4" Logistics Posts




Low Silhouette Design with Corner Protectors



100.5" Plywood Lined Aluminum Roof Galvanized Roof Bows 24" Centers



101" Plastic Lined 12" Black Plastic Scuff 1/2" Logistic Posts

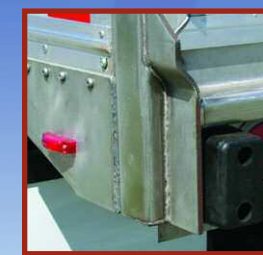

Impact Gusset and Bumper Blocks



Roll-Up Door Pictured with Painted Rear Frame



Quad Hardware Door Locks

